

ardesia® CONNECTIONS

To make easier your daily work we have provided the standard configurations with reducing bushes and end caps already mounted. When ordering please specify the desired connection, otherwise, the radiator will be supplied without any configurations.









To order Accessories and fittings please consult page 508

STANDARD CONFIGURATIONS

Standard configurations, except for connection "0" or special executions excluded, include airvent end caps and bushes already mounted. It is necessary to specify the desired combination (example: 1,2,3,8,D,M,AS ecc...).


PLEASE NOTE: besides the configurations hereby presented, all configurations with diameters of 3/4" • 1/2" • 3/8" • 1/4" are available.

LEGENDA

| | |
|---|---|
|  In |  Out |
|  Airvent |  Connection 1/2" |
|  Movable Diverter |  Welded Diverter |
| Tc End cap |  Thermostatic head |
|  Bidirectional | |


SIDE AND OPPOSITE CONNECTIONS

Airvent included

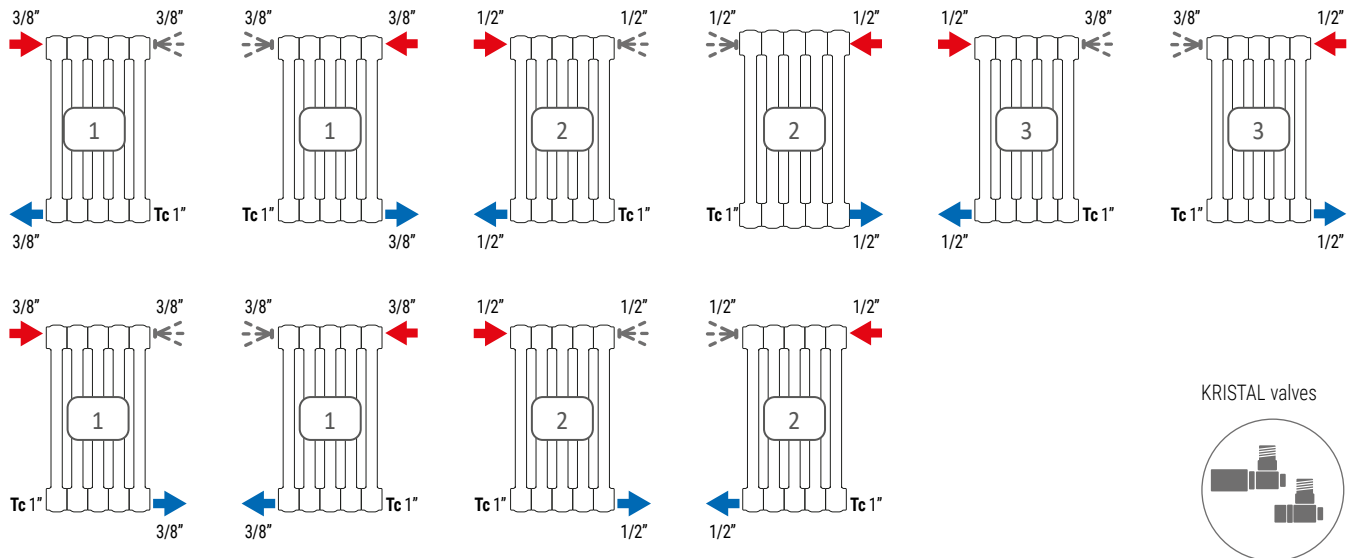


BOTTOM-SIDE CONNECTIONS

Airvent included

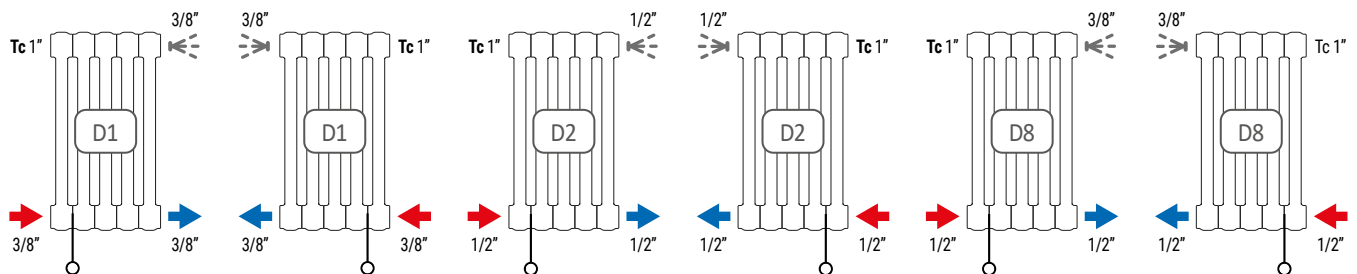

UNIVERSAL CONNECTIONS

Airvent included

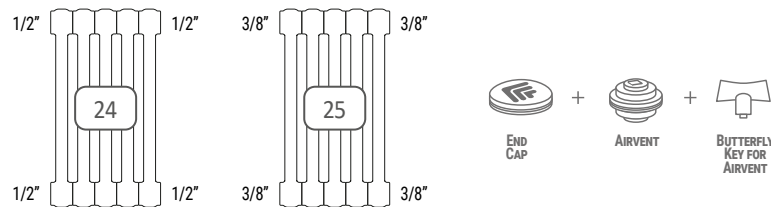

CONNECTIONS FOR NIPLING OPERATION

4 open connections with 1" threading end cap, reducing bushes and Airvent are supplied separately, on demand.




Ideal for wholesalers that wish to have a stock of radiators ready for use.

The "0" connection for nipling operation allows to have batteries of several dimensions and with an almost endless number of heating sections.

BIDIRECTIONAL CONNECTIONS


Airvent included

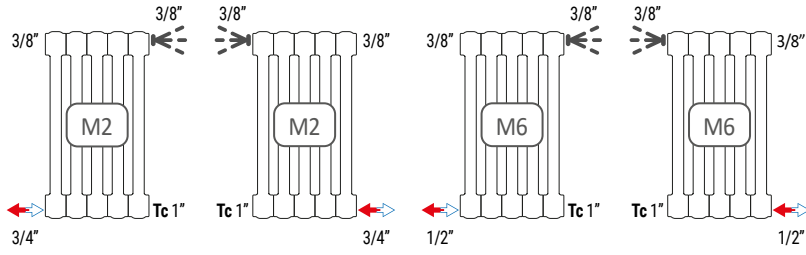

Valve Bidirectional Kristal Cordivari only for M6 bidirectional connection for batteries from 3 up to 20 sections. (see ACCESSORIES).

BIDIRECTIONAL CONNECTIONS


Airvent included

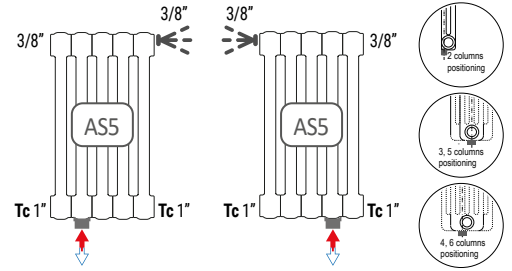

Bidirectional underneath connection placed on the second section


OPPOSITE SPECIAL CONNECTIONS

Airvent included

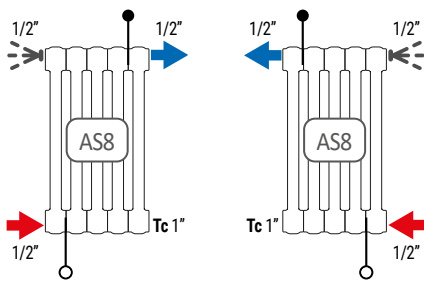


WITH UPPER SLEEVES CONNECTIONS

Airvent included

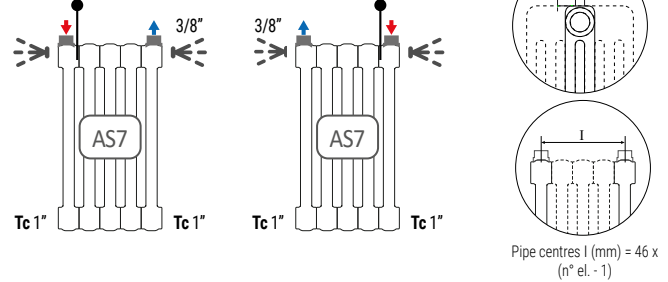


UNDERNEATH WELDED SLEEVES CONNECTIONS

Airvent included

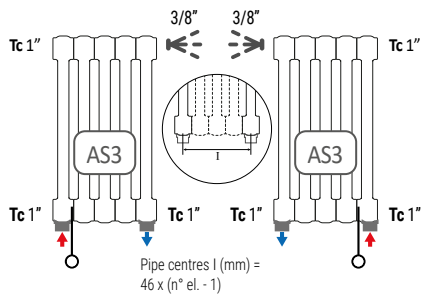


Pipe centres different from standard are available on demand.



Airvent included

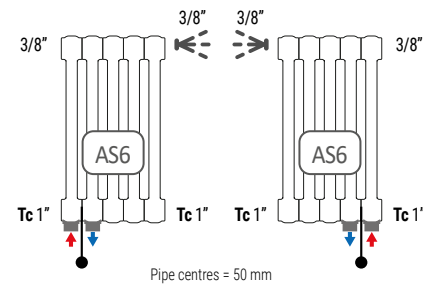

Airvent included

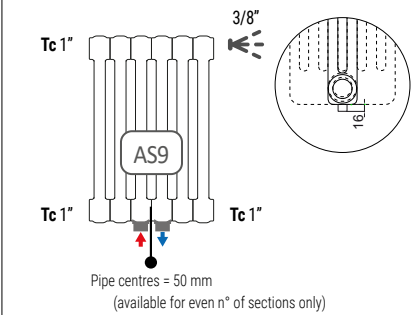

WELDED UNDERNEATH SLEEVES WITH PIPE CENTRES 50 MM 1/2" AND THERMOSTATIC HEAD MOUNTED*

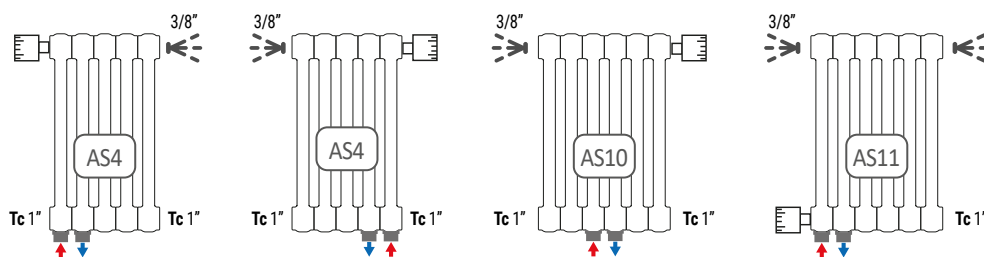

* Valve unit and Liquid thermostatic head Overtrop with liquid functioning in accordance with UNI EN 215:2007 regulation.