

# ardesia® CONNECTIONS

To make easier your daily work we have provided the standard configurations with reducing bushes and end caps already mounted. When ordering please specify the desired connection, otherwise, the radiator will be supplied without any configurations.









To order Accessories and fittings please consult page 508

## STANDARD CONFIGURATIONS

Standard configurations, except for connection "0" or special executions excluded, include airvent end caps and bushes already mounted. It is necessary to specify the desired combination (example: 1,2,3,8,D,M,AS ecc...).


PLEASE NOTE: besides the configurations hereby presented, all configurations with diameters of 3/4" • 1/2" • 3/8" • 1/4" are available.

## LEGENDA

 In	 Out
 Airvent	 Connection 1/2"
 Movable Diverter	 Welded Diverter
Tc End cap	 Thermostatic head
 Bidirectional	


## SIDE AND OPPOSITE CONNECTIONS

Airvent included

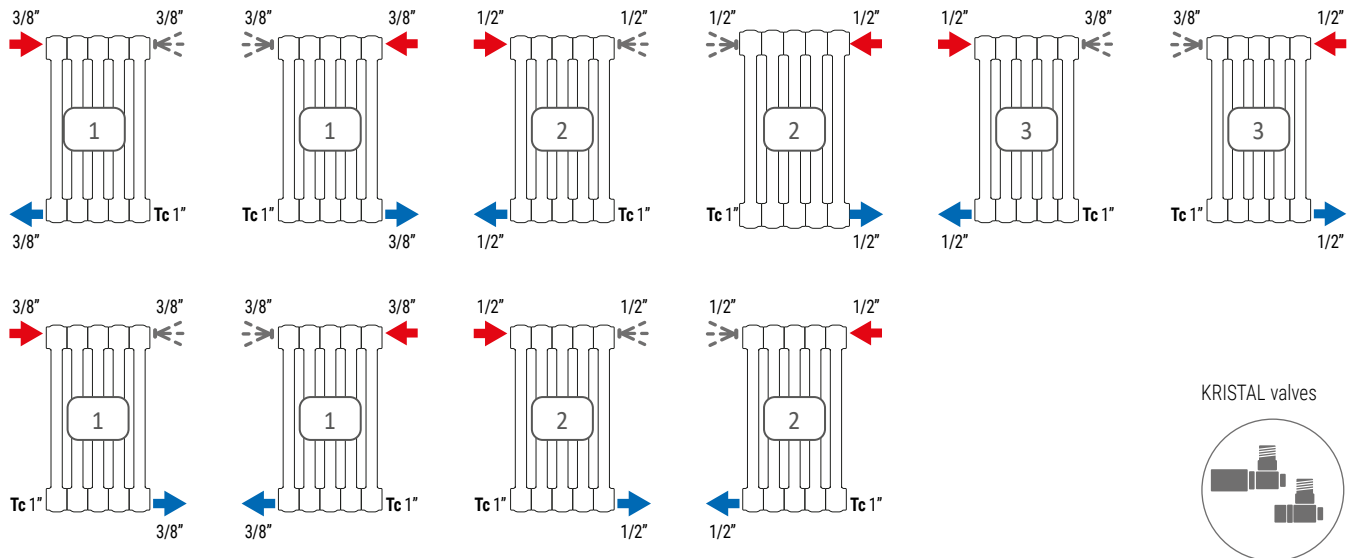


## BOTTOM-SIDE CONNECTIONS

Airvent included

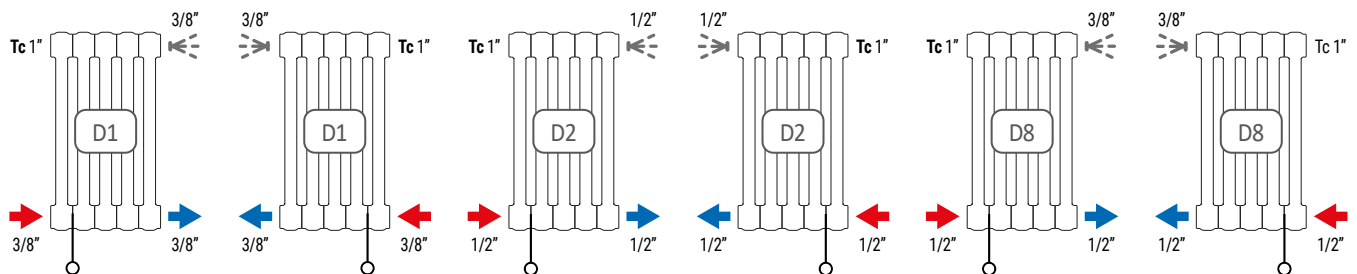

## UNIVERSAL CONNECTIONS

Airvent included

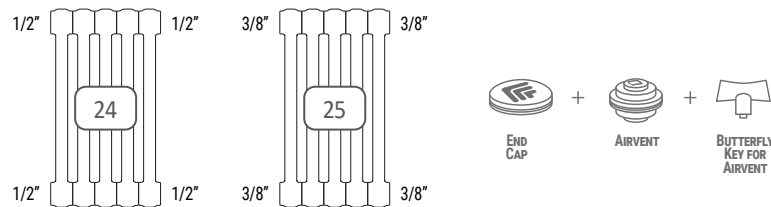

## CONNECTIONS FOR NIPLING OPERATION

4 open connections with 1" threading end cap, reducing bushes and Airvent are supplied separately, on demand.




**Ideal for wholesalers** that wish to have a stock of radiators ready for use.

The "0" connection for nipling operation allows to have batteries of several dimensions and with an almost endless number of heating sections.

## BIDIRECTIONAL CONNECTIONS


Airvent included

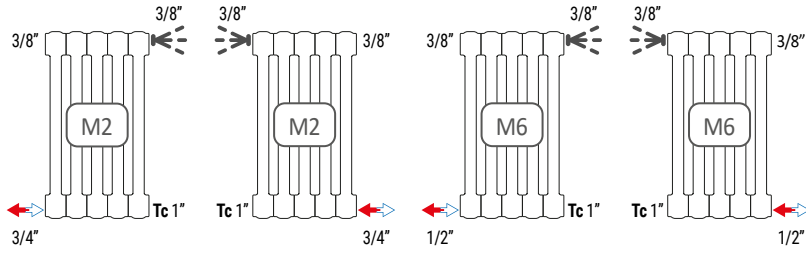

Valve Bidirectional Kristal Cordivari only for M6 bidirectional connection for batteries from 3 up to 20 sections. (see ACCESSORIES).

## BIDIRECTIONAL CONNECTIONS


Airvent included

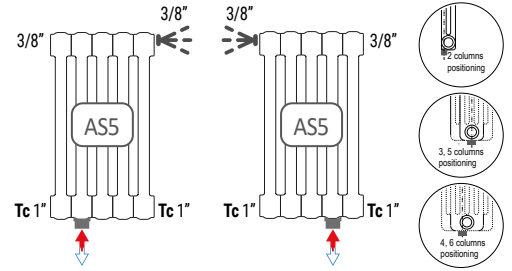

Bidirectional underneath connection placed on the second section


## OPPOSITE SPECIAL CONNECTIONS

Airvent included

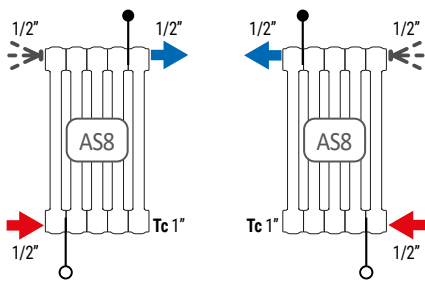


## WITH UPPER SLEEVES CONNECTIONS

Airvent included

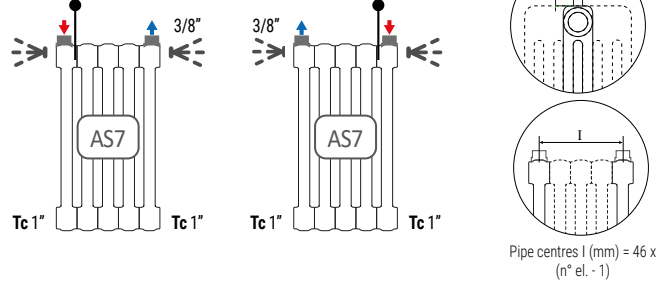


## UNDERNEATH WELDED SLEEVES CONNECTIONS

Airvent included

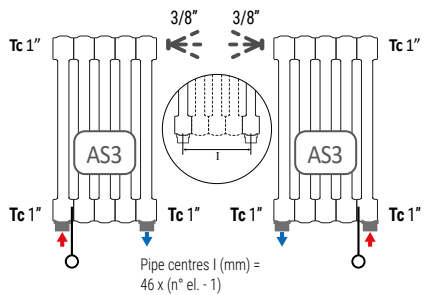


Pipe centres different from standard are available on demand.


Airvent included

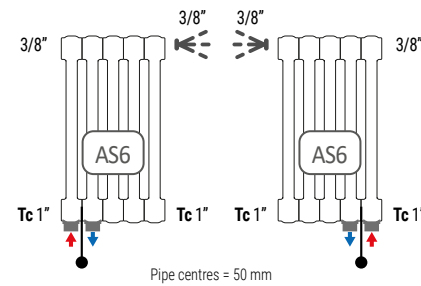

Airvent included

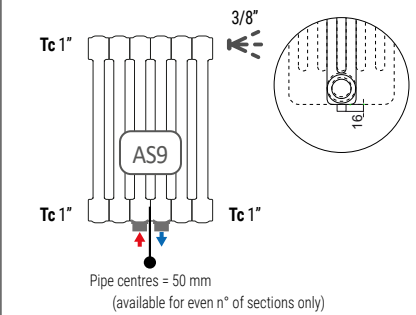

## WELDED UNDERNEATH SLEEVES WITH PIPE CENTRES 50 MM 1/2" AND THERMOSTATIC HEAD MOUNTED\*

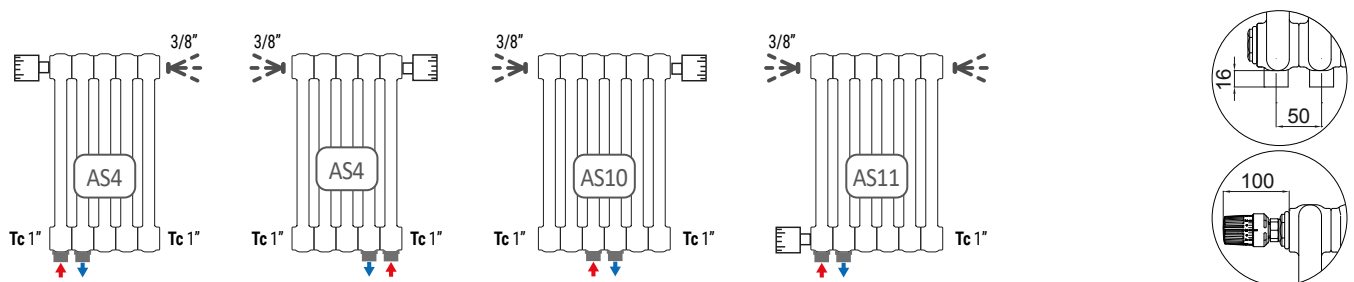

\* Valve unit and Liquid thermostatic head Overtrop with liquid functioning in accordance with UNI EN 215:2007 regulation.