



ARDESIA®

4 COLUMNS

WARRANTY
5 YEARS

MATERIAL:

- Moulded heads in mild steel.
- Electro-welded mild steel tubes ø 25 mm.

PACKAGING:

The radiator is protected by a recycled film in polyethylene and with a box in recycled carton. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

Functioning: hot water	Maximum working pressure	10 bar	Maximum temperature	110°C	Hub	1"
	Testing conditions	13 bar	Minimum flow in % of the nominal flow rate:	18	Section width	46 mm

CERTIFICATES



HOW TO ORDER ARDESIA® 4 COLUMNS

ARTICLE NR. STRUCTURE

Model and nr of columns	Nr of Elements	Height in mm	Code of the connection	Code of the colour	Constant value
AAA	BB	CCCC	DDD	EEE	A

EXAMPLE


Model and nr of columns E.g.: Ardesia® 4 columns	Nr of Elements E.g.: 12 elements	Height in mm Example: 1200 mm	Code of the connection Example: connection M2	Code of the colour Example: S20 - Jasmine	Constant value
AR4	12	1200	M02	S20	A

EXAMPLE OF ARTICLE CODE CREATION

In the case of a radiator:
AR4..... ARDESIA® 4 COLUMNS
12..... 12 elements
1200..... Height 1200 mm
M02..... connection M2
S20..... colour S20 - Jasmine
A..... (Constant value)
 The article code will be:
AR4 12 1200 M02 S20 A

TECHNICAL DATA PER SECTION

Height H [mm]	207	300	400	500	600	750	900	1000	1200	1500	1800	2000	2200	2500
Pipe centres l [mm]	151	244	344	444	544	694	844	944	1144	1444	1744	1944	2144	2444
(90/70/20°C) ΔT 60 = W	40,7	58,9	75,5	91,7	107,6	131,3	154,8	169,9	199,7	244,3	290,1	320,9	352,1	399,6
(75/65/20°C) ΔT 50 = W	32	46,8	59,8	72,4	84,7	102,9	120,8	132,7	156,2	191,4	226,6	250,3	274,1	310,2
(65/55/20°C) ΔT 40 = W	23,9	35,3	44,9	54,2	63,2	76,4	89,2	98,1	115,6	142	167,6	184,6	201,7	227,5
(55/45/20°C) ΔT 30 = W	16,3	24,5	31,1	37,3	43,4	52	60,4	66,4	78,5	96,6	113,5	124,7	135,9	152,5
Water content [lt]	0,56	0,72	0,88	1,04	1,2	1,44	1,68	1,84	2,17	2,65	3,13	3,45	3,77	4,25
Dry Weight [kg]	0,71	0,99	1,27	1,55	1,84	2,26	2,68	2,96	3,53	4,37	5,22	5,78	6,35	7,19
Exp. [n]	1,317	1,265	1,28	1,296	1,312	1,335	1,359	1,355	1,348	1,338	1,353	1,364	1,374	1,389
Nominal flow rate [kg/h]	2,8	4	5,1	6,2	7,3	8,8	10,4	11,4	13,4	16,5	19,5	21,5	23,6	26,7
Radiation quote [%]	20	20	19	19	19	19	18	18	18	17	17	16	16	15
Surface [m²]	0,07	0,1	0,13	0,16	0,19	0,23	0,28	0,31	0,37	0,46	0,55	0,61	0,67	0,76

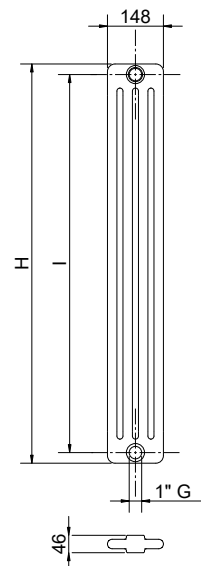

4 COLUMNS STANDARD HEIGHTS



Elements Width [mm]	HEIGHTS [mm]														
	207	300	400	500	600	750	900	1000	1200	1500	1800	2000	2200	2500	
3															
138 mm	W	96	140	179	217	254	309	362	398	469	574	680	751	822	931
4															
184 mm	W	128	187	239	290	339	412	483	531	625	766	906	1001	1096	1241
5															
230 mm	W	160	234	299	362	424	515	604	664	781	957	1133	1252	1371	1551
6															
276 mm	W	192	281	359	434	508	617	725	796	937	1148	1360	1502	1645	1861
7															
322 mm	W	224	328	419	507	593	720	846	929	1093	1340	1586	1752	1919	2171
8															
368 mm	W	256	374	478	579	678	823	966	1062	1250	1531	1813	2002	2193	2482
9															
414 mm	W	288	421	538	652	762	926	1087	1194	1406	1723	2039	2253	2467	2792
10															
460 mm	W	320	468	598	724	847	1029	1208	1327	1562	1914	2266	2503	2741	3102
11															
506 mm	W	352	515	658	796	932	1132	1329	1460	1718	2105	2493	2753	3015	3412
12															
552 mm	W	384	562	718	869	1016	1235	1450	1592	1874	2297	2719	3004	3289	3722
13															
598 mm	W	416	608	777	941	1101	1338	1570	1725	2031	2488	2946	3254	3563	4033
14															
644 mm	W	448	655	837	1014	1186	1441	1691	1858	2187	2680	3172	3504	3837	4343
15															
690 mm	W	480	702	897	1086	1271	1544	1812	1991	2343	2871	3399	3755	4112	4653
16															
736 mm	W	512	749	957	1158	1355	1646	1933	2123	2499	3062	3626	4005	4386	4963
17															
782 mm	W	544	796	1017	1231	1440	1749	2054	2256	2655	3254	3852	4255	4660	5273
18															
828 mm	W	576	842	1076	1303	1525	1852	2174	2389	2812	3445	4079	4505	4934	5584
19															
874 mm	W	608	889	1136	1376	1609	1955	2295	2521	2968	3637	4305	4756	5208	5894
20															
920 mm	W	640	936	1196	1448	1694	2058	2416	2654	3124	3828	4532	5006	5482	6204
21															
966 mm	W	672	983	1256	1520	1779	2161	2537	2787	3280	4019	4759	5256	5756	6514
22															
1012 mm	W	704	1030	1316	1593	1863	2264	2658	2919	3436	4211	4985	5507	6030	6824
23															
1058 mm	W	736	1076	1375	1665	1948	2367	2778	3052	3593	4402	5212	5757	6304	7135
24															
1104 mm	W	768	1123	1435	1738	2033	2470	2899	3185	3749	4594	5438	6007	6578	7445
25															
1150 mm	W	800	1170	1495	1810	2118	2573	3020	3318	3905	4785	5665	6258	6853	7755
26															
1196 mm	W	832	1217	1555	1882	2202	2675	3141	3450	4061	4976	5892	6508	7127	8065
27															
1242 mm	W	864	1264	1615	1955	2287	2778	3262	3583	4217	5168	6118	6758	7401	8375
28															
1288 mm	W	896	1310	1674	2027	2372	2881	3382	3716	4374	5359	6345	7008	7675	8686
29															
1344 mm	W	928	1357	1734	2100	2456	2984	3503	3848	4530	5551	6571	7259	7949	8996
30															
1380 mm	W	960	1404	1794	2172	2541	3087	3624	3981	4686	5742	6798	7509	8223	9306
31															
1426 mm	W	992	1451	1854	2244	2626	3190	3745	4114	4842	5933	7025	7759	8497	9616
32															
1472 mm	W	1024	1498	1914	2317	2710	3293	3866	4246	4998	6125	7251	8010	8771	9926
33															
1518 mm	W	1056	1544	1973	2389	2795	3396	3986	4379	5155	6316	7478	8260	9045	10237
34															
1564 mm	W	1088	1591	2033	2462	2880	3499	4107	4512	5311	6508	7704	8510	9319	10547
35															
1610 mm	W	1120	1638	2093	2534	2965	3602	4228	4645	5467	6699	7931	8761	9594	10857
36															
1656 mm	W	1152	1685	2153	2606	3049	3704	4349	4777	5623	6890	8158	9011	9868	11167
37															
1702 mm	W	1184	1732	2213	2679	3134	3807	4470	4910	5779	7082	8384	9261	10142	11477
38															
1748 mm	W	1216	1778	2272	2751	3219	3910	4590	5043	5936	7273	8611	9511	10416	11788
39															
1794 mm	W	1248	1825	2332	2824	3303	4013	4711	5175	6092	7465	8837	9762	10690	12098
40															
1840 mm	W	1280	1872	2392	2896	3388	4116	4832	5308	6248	7656	9064	10012	10964	12408

Radiators provided in separate batteries to facilitate transport and installation. Batteries can be joined together (nipping operation) with lock key smaller than 1 mt. Each couple of batteries inclusive of 2 nipples and 2 seals. For batteries with more than 80 sections with lateral connection.



ARDESIA®

TOWEL RAILS

ELECTRIC

STAINLESS STEEL

RADIATORS

VENTILATION
RADIATORS

MY WAY®
ACCESSORIES AND
TECHNICAL SUPPORT