



ELEN 18 WIDE

POLISHED STAINLESS STEEL

WARRANTY
10 YEARS

MATERIAL:

- Vertical collectors in polished stainless steel \varnothing 30 mm.
- Horizontal elements in polished stainless steel \varnothing 18 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

P. Max: 8 bar

Functioning: hot water

T. Max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

CERTIFICATES



ACCESSORIES



Kristal valve square with thermostatic option chromed

Copper conn. \varnothing 12/14/15
Art. nr. 5991990311165

Multilayer conn. \varnothing 16
Art. nr. 5991990311166



Kristal corner valve with thermostatic option chromed


Copper conn. \varnothing 12/14/15
Art. nr. 5991990301148

Multilayer conn. \varnothing 16
Art. nr. 5991990301147




Kit 2 hooks polished stainless steel

Art. nr. 5991990010216



Quotes for square Kristal valves with thermostatic option







Quotes for corner Kristal valves with thermostatic option



Pair of polished tube cover kit

Art. nr. 5103000000061

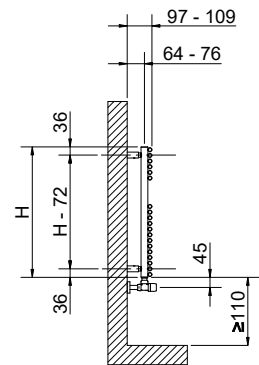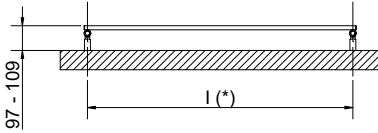

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

ELEN 18 WIDE POLISHED STAINLESS STEEL

Height [mm]	Width L [mm]	Pipe centres l [mm]	Art. nr.	Dry Weight [Kg]	Surface [m ²]	Water content [lt]	Thermal output [Watt]		Exp. n	Dual energy kit [Watt]
							$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		
400	1200	1170	3551440130205	6,3	0,89	3,5	387	210	1,1980	-
	1400	1370	3551440130206	7,3	1,025	3,9	444	232	1,2727	-
575	1200	1170	3551440130207	9,9	1,4	5,4	600	327	1,1910	300
	1400	1370	3551440130208	11,4	1,6	6,2	701	375	1,2231	300

For output at different ΔT , please refer to the following formula: desired output = output at ΔT 50 x (desired $\Delta t/50$)ⁿ