



ELEN 22

POLISHED STAINLESS STEEL

WARRANTY
10 YEARS

MATERIAL:

- Vertical collectors in polished stainless steel \varnothing 30 mm.
- Horizontal elements in polished stainless steel \varnothing 22 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

P. Max: 8 bar

Functioning: hot water

T. Max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

CERTIFICATES




ACCESSORIES



Kristal valve square with thermostatic option chromed

Copper conn. \varnothing 12/14/15
Art. nr. 5991990311165

Multilayer conn. \varnothing 16
Art. nr. 5991990311166




Quotes for square Kristal valves with thermostatic option



Kristal corner valve with thermostatic option chromed

Copper conn. \varnothing 12/14/15
Art. nr. 5991990301148

Multilayer conn. \varnothing 16
Art. nr. 5991990301147




Quotes for corner Kristal valves with thermostatic option




Thermostatic head chromed

(Kit 2 pieces)








Art. nr. 5035270710015



Thermostatic head quotes



Detail of the pipe centres 50 mm version

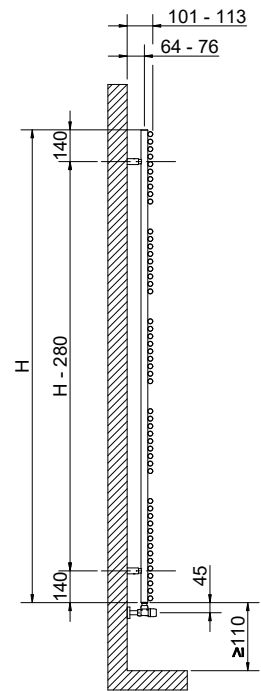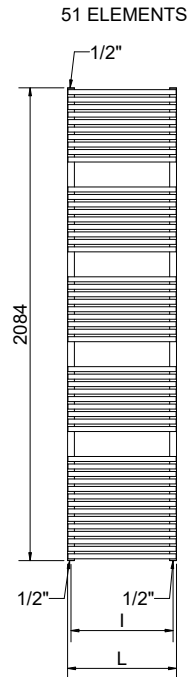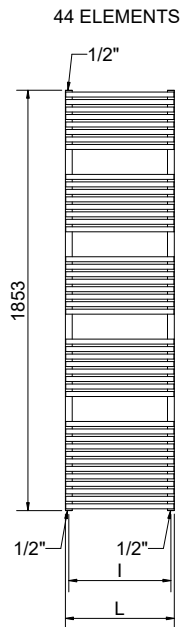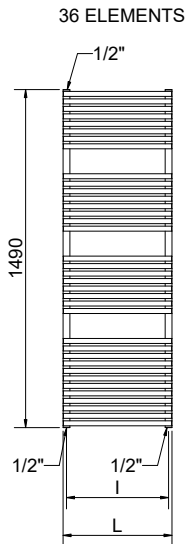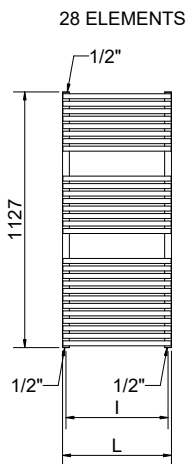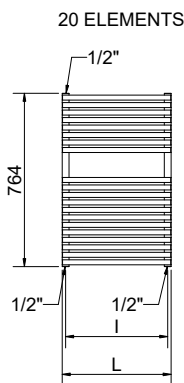

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

ELEN 22 POLISHED STAINLESS STEEL

Height [mm]	Width L [mm]	Pipe centres l [mm]	Art. nr.	Pipe centres 50 mm		Thermal output [Watt]			Dual energy kit [Watt]		
				Art. nr.	Art. nr.	Δt=50°C	Δt=30°C	Exp. n			
764	430	400	3551440133080	3551440133110	5,8	0,74	3,62	276	147	1,2334	-
	480	450	3551440133085	3551440133114	6,3	0,81	3,93	305	163	1,2248	300
	430	400	3551440133081	3551440133111	8,2	1,04	5,13	387	206	1,2348	400
1127	480	450	3551440133086	3551440133115	8,9	1,14	5,57	426	228	1,2265	400
	530	500	3551440133091	3551440133119	9,6	1,24	6,01	466	250	1,2181	400
	580	550	3551440133096	3551440133123	10,3	1,33	6,45	505	272	1,2098	500
1490	430	400	3551440133082	3551440133112	10,6	1,35	6,65	503	268	1,2289	500
	480	450	3551440133087	3551440133116	11,5	1,48	7,21	553	296	1,2233	500
	530	500	3551440133092	3551440133120	12,4	1,60	7,78	604	324	1,2178	600
	580	550	3551440133097	3551440133124	13,4	1,72	8,34	654	352	1,2122	600
1853	430	400	3551440133083	3551440133113	13,0	1,66	8,16	628	338	1,2147	600
	480	450	3551440133088	3551440133117	14,1	1,81	8,85	689	371	1,2123	700
	530	500	3551440133093	3551440133121	15,2	1,96	9,54	750	404	1,2099	700
	580	550	3551440133098	3551440133125	16,4	2,11	10,23	811	438	1,2076	700
	480	450	3551440133089	3551440133118	16,2	2,08	10,18	781	422	1,2053	700
2084	530	500	3551440133094	3551440133122	17,6	2,26	10,99	849	459	1,2049	700
	580	550	3551440133099	3551440133126	18,9	2,44	11,79	917	496	1,2046	900
	730	700	3551440133104	3551440133127	22,9	2,97	14,19	1122	606	1,2037	1000

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (desired Δt/50)ⁿ