



# KELLY 5010

**EUROPEAN  
WARRANTY**

**MATERIAL:**

- Vertical collectors in painted mild steel  $\varnothing$  38 mm.
- Horizontal heating elements in painted mild steel 50x10 mm.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

**PACKAGING:**

The radiator is protected by recyclable carton box. User notice included.

**PAINTING PROCESS:**

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

**COLOURS:**

See colour chart.

**ACCESSORIES:**

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- Hot water
- Electric
- Dual energy
- Blower
- Blower dual energy

P. Max: 5 bar

Functioning: hot water


T. Max: 110° C

Connections: n° 2 x 1/2" G - 2 x 1/2" G

## CERTIFICATES



**UPSIDE DOWN**




## ACCESSORIES

**Kristal valve square pipe centres 50 mm left white R01**



Copper conn.  $\varnothing$  12/14/15  
Art. nr. 5991990311188

Multilayer conn.  $\varnothing$  16  
Art. nr. 5991990311187




Quotes for square Kristal valves with thermostatic option



**Thermostatic head white**

(Kit 2 pieces)

Art. nr. 5035270710016




Thermostatic head quotes



**Thermostatic head chromed**

(Kit 2 pieces)


Art. nr. 5035270710015



Thermostatic head quotes







If ordered separately from the radiator, the accessories are available in standard white only

Art. nr. are referred to colour WHITE R01

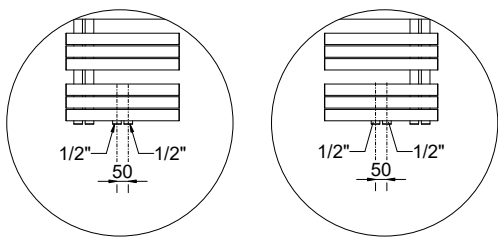

Detail of central connection  
(collectors on the left)


Detail of central connection  
(collectors on the right)

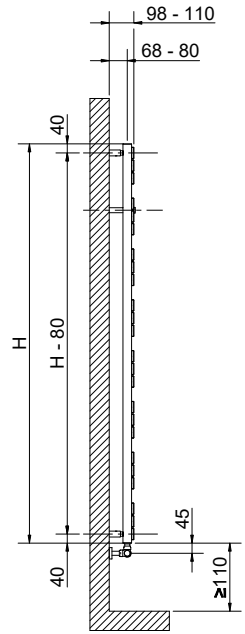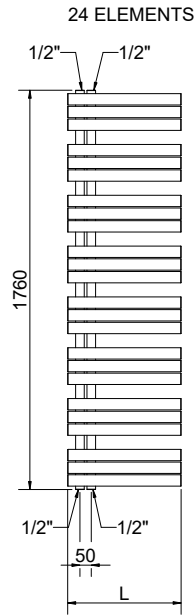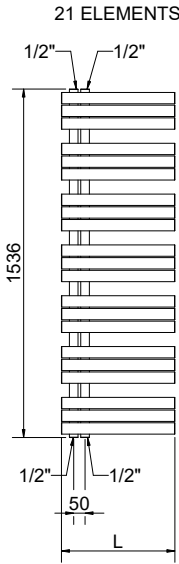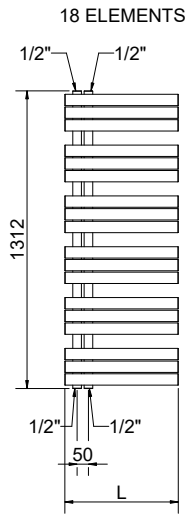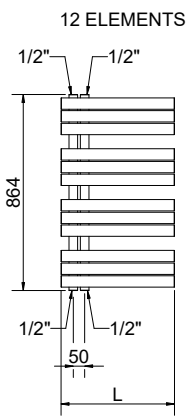

Quotes for Kristal valves


## KELLY 5010

Height [mm]	Width L [mm]	Art. nr.	Dry Weight [Kg]	Surface [m <sup>2</sup> ]	Water content [lit]	Thermal output [Watt]			Exp. n	Dual energy kit [Watt]
						Δt=50°C	Δt=30°C			
<b>864</b>	500	3551726100025	8,5	0,87	3,9	381	204	1,2243	400	
	600	3551726100029	9,8	1,01	4,3	443	234	1,2536		
<b>1312</b>	500	3551726100026	12,7	1,31	5,8	563	300	1,2351	500	
	600	3551726100030	14,6	1,51	6,5	637	336	1,2533		
<b>1536</b>	500	3551726100027	14,9	1,53	6,8	652	341	1,2695	600	
	600	3551726100031	17,1	1,77	7,6	742	388	1,2696		
<b>1760</b>	500	3551726100028	17,0	1,75	7,8	728	378	1,2837	700	
	600	3551726100032	19,5	2,02	8,7	875	455	1,2781		

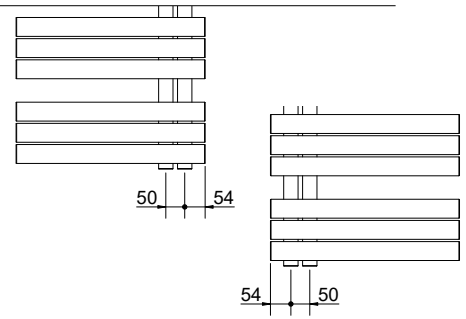


## KELLY 5010 CENTRAL CONNECTION (COLLECTORS ON THE RIGHT)

Height [mm]	Width L [mm]	Art. nr.
<b>864</b>	500	3551726100041
	600	3551726100045
<b>1312</b>	500	3551726100042
	600	3551726100046
<b>1536</b>	500	3551726100043
	600	3551726100047
<b>1760</b>	500	3551726100044
	600	3551726100048



## KELLY 5010 CENTRAL CONNECTION (COLLECTORS ON THE LEFT)

Height [mm]	Width L [mm]	Art. nr.
<b>864</b>	500	3551726100033
	600	3551726100037
<b>1312</b>	500	3551726100034
	600	3551726100038
<b>1536</b>	500	3551726100035
	600	3551726100039
<b>1760</b>	500	3551726100036
	600	3551726100040



Art. nr. are referred to colour WHITE R01

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (desired ΔT/50)<sup>n</sup>