

# LISA® 22

## CURVED CHROMED



#### AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

#### Material:

- Vertical collectors in mild steel semi oval da 30x40 mm.
- Curved horizontal heating elements in mild steel  $\varnothing$  22 mm.

#### Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Max pressure: 8 bar

Functioning: hot water

Max temperature: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

#### Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

#### Finishing:

Chrome (PLATED IN ITALY)

### ACCESSORIES

For Accessories range see Accessories chapter



CHROMED VALVE  
KIT



KIT 2 HOOKS  
CHROMED




MY WAY®  
SYSTEM


For information about Kristal valves, see radiators and towel rails catalogue

Art. nr. 5991990310303



For information see RADIATORS and TOWEL RAILS catalogue




Detail of the 50 mm pipe centres version.




13 ELEMENTS

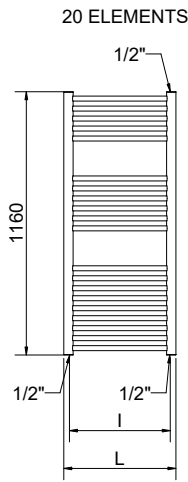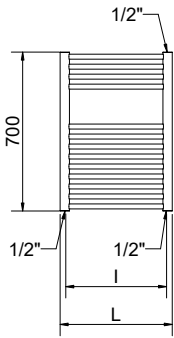


20 ELEMENTS

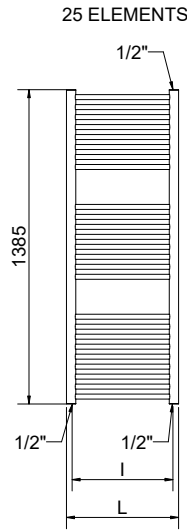

25 ELEMENTS

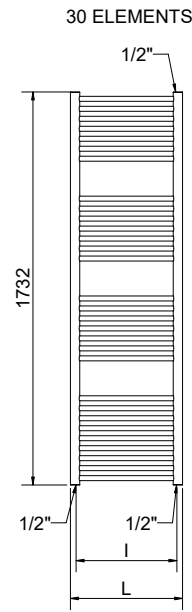

30 ELEMENTS

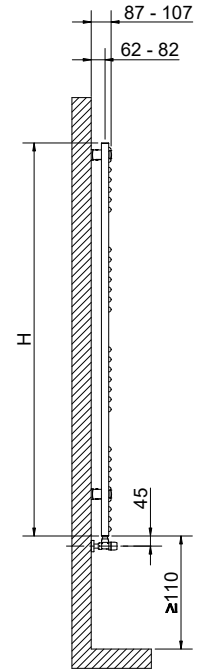

## LISA® 22 CURVED CHROMED

Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.	PIPE CENTRES 50 mm		Dry weight [Kg]	Surface [m²]	Water content [lt]	Thermal output [Watt]		Exponent [n]	Dual energy kit [Watt]
				Art. nr.					Δt=50°C	Δt=30°C		
700	400	350	3551646101285	3551646101289		3,8	0,46	2,6	181	95	1,24994	-
	450	396	3551646101241	3551646101261		4,0	5,10	2,9	197	104	1,24795	-
	500	444	3551646101242	3551646101262		4,3	0,55	3,1	213	112	1,24595	-
	550	493	3551646101243	3551646101263		4,6	0,60	3,3	230	121	1,24396	-
	600	546	3551646101244	3551646101264		4,9	0,64	3,5	246	130	1,24196	-
1160	400	350	3551646101286	3551646101290		6,0	0,73	4,2	289	152	1,25655	300
	450	396	3551646101245	3551646101265		6,4	0,80	4,5	315	165	1,25689	300
	500	444	3551646101246	3551646101266		6,8	0,87	4,9	340	178	1,25724	300
	550	493	3551646101247	3551646101267		7,2	0,94	5,2	366	192	1,25758	300
	600	546	3551646101248	3551646101268		7,6	1,01	5,5	391	205	1,25792	400
1385	400	350	3551646101287	3551646101291		7,3	0,90	5,2	339	178	1,25877	300
	450	396	3551646101249	3551646101269		7,8	0,99	5,6	372	195	1,25745	300
	500	444	3551646101250	3551646101270		8,3	1,07	6,0	406	213	1,25613	400
	550	493	3551646101251	3551646101271		8,8	1,16	6,4	440	231	1,25481	400
	600	546	3551646101252	3551646101272		9,3	1,25	6,8	474	249	1,25350	500
1732	400	350	3551646101288	3551646101292		8,9	1,10	6,3	439	231	1,25027	400
	450	396	3551646101253	3551646101273		9,5	1,20	6,8	479	252	1,25195	500
	500	444	3551646101254	3551646101274		10,1	1,31	7,3	519	273	1,25362	500
	550	493	3551646101255	3551646101275		10,8	1,41	7,8	559	294	1,25530	500
	600	546	3551646101256	3551646101276		11,4	1,51	8,3	599	315	1,25697	600

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)<sup>n</sup>**