



LUCY 25 CHROMED

**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in mild steel chromed \varnothing 30 mm.
- Horizontal heating elements in mild steel chromed \varnothing 25 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.
The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

FINISHING::

CHROMED (PLATED IN ITALY)

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

P. max: 8 bar

Functioning: hot water

T. max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

CERTIFICATES




ACCESSORIES



Kristal valve square with thermostatic option chromed

Copper conn. \varnothing 12/14/15
Art. nr. 5991990311165

Multilayer conn. \varnothing 16
Art. nr. 5991990311166




Quotes for square Kristal valves with thermostatic option



Kristal valve square pipe centres 50 mm with thermostatic option chromed

Copper conn. \varnothing 12/14/15
Art. nr. 5991990301152

Multilayer conn. \varnothing 16
Art. nr. 5991990301151




Quotes for square Kristal valves with thermostatic option




Thermostatic head chromed

(Kit 2 pieces)

Art. nr. 5035270710015



Thermostatic head quotes

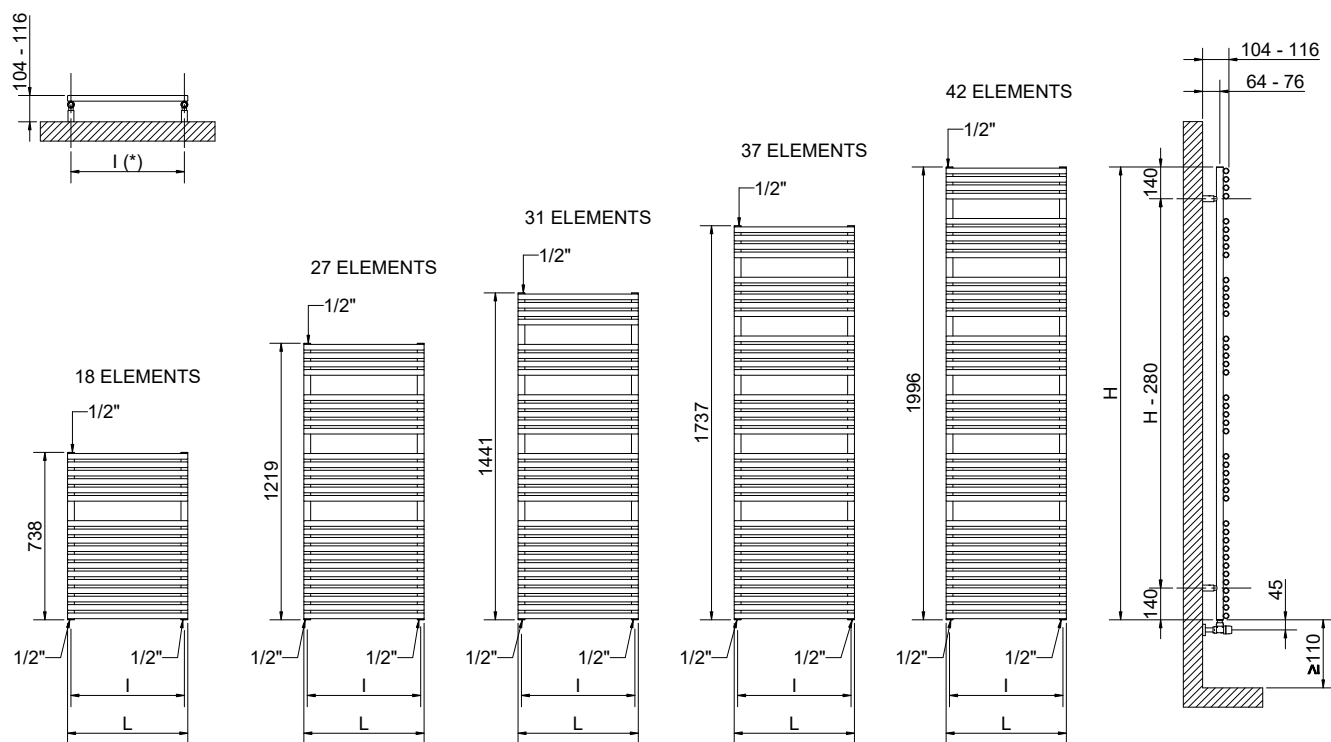

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

LUCY 25 CHROMED

Height [mm]	Width L [mm]	Pipe centres l [mm]	Art. nr.	Dry Weight [Kg]	Surface [m ²]	Water content [lt]	Thermal output [Watt]		Exp. n	Dual energy kit [Watt]
							Δt=50°C	Δt=30°C		
738	430	400	3551406110001	5,8	0,747	4,1	310	173	1,1418	300
	480	450	3551406110005	6,4	0,818	4,5	338	188	1,1513	300
1219	430	400	3551406110002	9,0	1,142	6,3	451	249	1,1615	400
	480	450	3551406110006	9,8	1,248	6,8	467	259	1,1565	400
	530	500	3551406110009	10,6	1,354	7,4	502	279	1,1516	500
1441	580	550	3551406110013	11,4	1,460	8,0	565	314	1,1460	500
	430	400	3551406110003	10,4	1,319	7,3	507	283	1,1405	500
	480	450	3551406110007	11,3	1,440	7,9	580	319	1,1676	600
	530	500	3551406110010	12,2	1,562	8,6	596	330	1,1562	600
1737	580	550	3551406110014	13,1	1,684	9,2	612	338	1,1606	600
	430	400	3551406110004	12,4	1,577	8,7	583	323	1,1568	600
	480	450	3551406110008	13,5	1,722	9,5	646	358	1,1529	600
	530	500	3551406110011	14,6	1,868	10,2	665	367	1,1644	700
1996	580	550	3551406110015	15,7	2,013	11,0	715	394	1,1666	700
	530	500	3551406110012	16,6	2,125	11,6	780	430	1,1638	700
	580	550	3551406110016	17,8	2,289	12,5	830	459	1,1610	700
	730	700	3551406110017	21,6	2,784	15,1	938	517	1,1659	900

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (desired Δt/50)ⁿ