



STEFANIA

SATIN STAINLESS STEEL

WARRANTY
10 YEARS

MATERIAL:

- Vertical collectors in satin stainless steel \varnothing 30 mm.
- Horizontal elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

P. Max: 8 bar

Functioning: hot water

T. Max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

CERTIFICATES




ACCESSORIES

Kristal valve square with thermostatic option satin



Copper conn. \varnothing 12/14/15
Art. nr. 5991990321143

Multilayer conn. \varnothing 16
Art. nr. 5991990321144




Quotes for square Kristal valves with thermostatic option

Kristal corner valve with thermostatic option satin



Copper conn. \varnothing 12/14/15
Art. nr. 5991990321134

Multilayer conn. \varnothing 16
Art. nr. 5991990321133



Quotes for corner Kristal valves with thermostatic option

Kit 2 hooks satin stainless steel




Art. nr. 5991990010219








Pair of satin tube cover kit



Art. nr. 5103000000062



Detail of the pipe centres 50 mm version

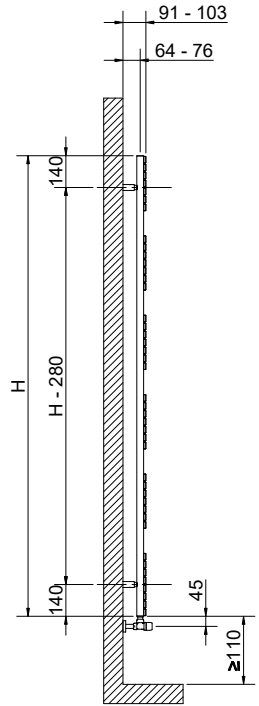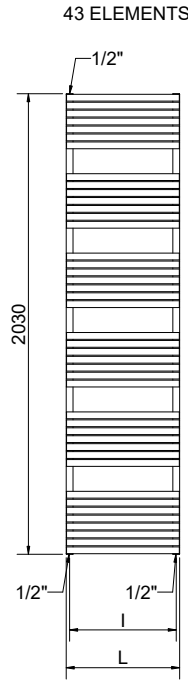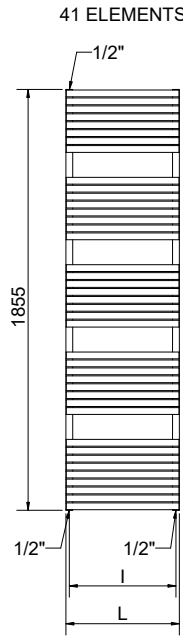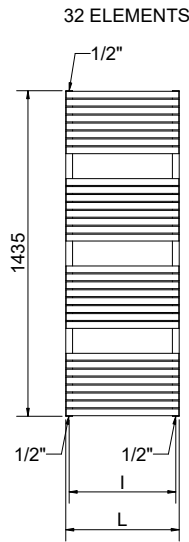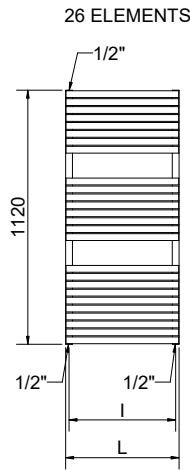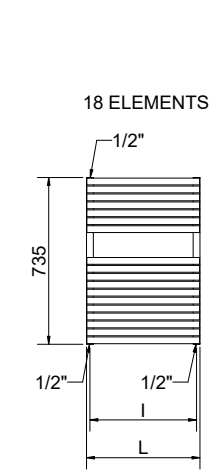

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

STEFANIA SATIN STAINLESS STEEL

Height [mm]	Width L [mm]	Pipe centres l [mm]	Art. nr.	Pipe centres 50 mm		Thermal output [Watt]			Dual energy kit [Watt]		
				Art. nr.	Dry Weight [Kg]	Surface [m ²]	Water content [lt]	Δt=50°C		Δt=30°C	Exp. n
735	400	370	3551610130200	3551610130220	8,0	0,71	2,2	228	123	1,2072	-
	500	470	3551610130204	3551610130224	9,5	0,85	2,5	283	152	1,2128	300
	400	370	3551610130201	3551610130221	11,6	1,04	3,2	325	174	1,2285	300
1120	500	470	3551610130205	3551610130225	13,8	1,25	3,7	399	213	1,2283	400
	600	570	3551610130209	3551610130229	16,0	1,45	4,2	474	253	1,2281	500
	400	370	3551610130202	3551610130222	14,4	1,29	4,0	402	213	1,2444	400
1435	500	470	3551610130206	3551610130226	17,1	1,55	4,6	491	261	1,2398	500
	600	570	3551610130210	3551610130230	19,8	1,80	5,3	579	308	1,2366	600
	400	370	3551610130203	3551610130223	18,4	1,66	5,2	529	277	1,2683	500
1855	500	470	3551610130207	3551610130227	21,9	1,99	6,0	636	335	1,2572	600
	600	570	3551610130211	3551610130231	25,4	2,32	6,8	744	393	1,2493	700
	500	470	3551610130208	3551610130228	23,2	2,10	6,4	670	352	1,2611	700
2030	600	570	3551610130212	3551610130232	26,8	2,44	7,2	782	413	1,2521	700
	800	770	3551610130213	3551610130233	34,2	3,13	8,8	1005	533	1,2401	1000

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (desired Δt/50)ⁿ