



# E.SIGN CONTROL

PATENTED



5 YEARS WARRANTY

**MATERIAL:**

Super slim heating body in painted carbon steel.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.

The fixing kit is compliant with VDI 6036 norm, class 4.

**VALVE KIT INCLUDES:**

Valves with thermostatic head

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16 x2)

**PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box. Use and maintenance notice included.

**PAINTING PROCESS:**

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

**COLOURS:**

Radiators and accessories: standard white R01 colour.

## PRODUCT CERTIFICATES



P. max: 5 bar

T. max: 110° C


Available for central heating systems





Connections: n° 2 x G 1/2" - n° 2 x G 1/2"

## AWARDS




## REVERSIBLE




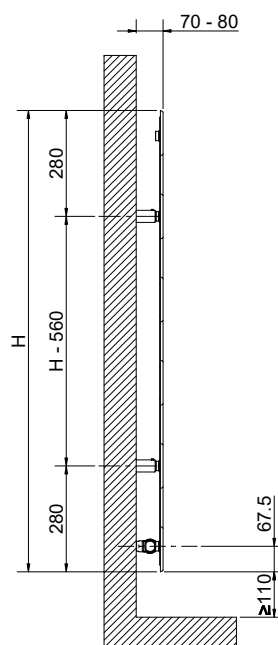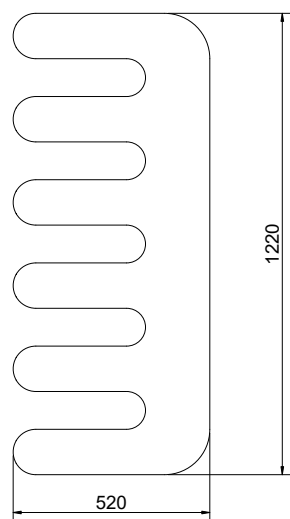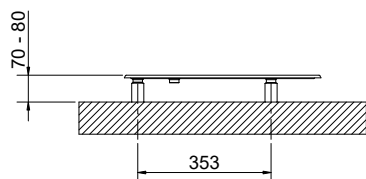

Version with PIPE CENTRES 50 mm

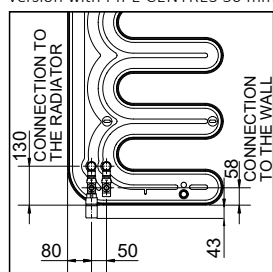

CONNECTION detail

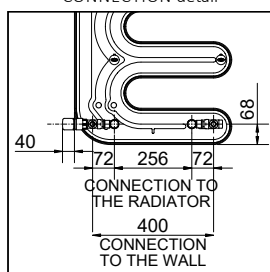

## E.SIGN CONTROL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]				$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3540806100210	<b>1220</b>	520	400	16,2	0,9	1,3	508	272	1,2225

Art. Nr. are referred to white R01 colour- version.

Art. nr. includes **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

## E.SIGN CONTROL - PIPE CENTRES 50 MM

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]				$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3540806100220	<b>1220</b>	520	50	16,2	0,9	1,3	508	272	1,2225

Art. Nr. are referred to white R01 colour- version.

Art. nr. includes **VALVE, HOLDER AND THERMOSTATIC HEAD**, compliant with UNI EN215:2007 and DM 19/02/2017.

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula = desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>