GIULY® SL

design **Mariano Moroni**

PATENTED

5 YEARS WARRANTY

MATERIAL:
Super slim heating body in painted carbon steel.

FIXING KIT:
Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

VALVE KIT INCLUDES:
Kit valvola e detentore
Fittings for copper pipe (Ø 12/14/15)
Fittings for multilayer pipe (Ø 16 x2)

PACKAGING:
The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

PAINTING PROCESS:
Painted with ecological epoxy. (Certificate DIN 55900-1,-2).
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:
Radiators and accessories: standard white R01 colour.
For other colours see colour chart.

PRODUCT CERTIFICATES

P. max: 5 bar

T. max: 110° C

Available for central heating systems

Connections: n° 2 x G 1/2”- n° 1 x G 1/2”

AWARD





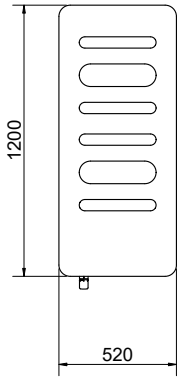

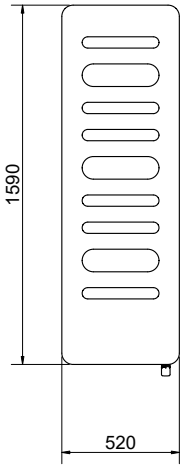

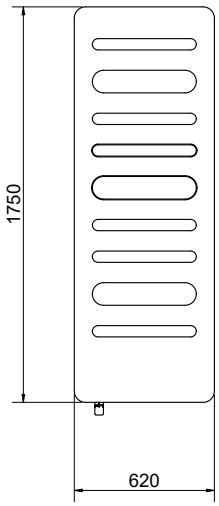

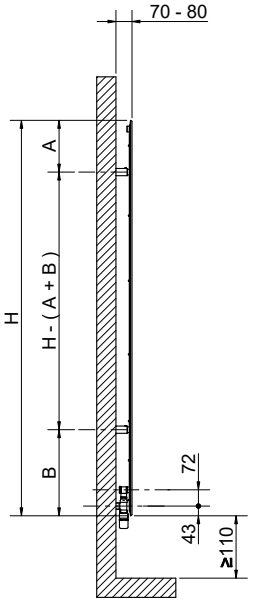

CONNECTION detail



H [mm]	A [mm]	B [mm]	l (*) [mm]
1200	218	222	400
1590	218	362	400
1750	229	381	505

GIULY® SL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	[Kg]	[m²]	[lt]	**Δt = 50°C**	Δt = 30°C	
3540806100222	**1200**	520	400	16	0,90	0,90	521	274	1,2603
3540806100223	**1590**	520	400	20	1,16	1,16	714	377	1,2518
3540806100225	**1750**	620	500	26	1,50	1,50	900	467	1,2849

Art. Nr. are referred to WHITE R01 colour version.

The art. nr. is inclusive of **VALVE AND HOLDER**.

For output at different Δt than 50°C, please refer to the following formula = desired output = output at Δt 50°C x (desired Δt/50)^n