



KELLY 38

POLISHED STAINLESS STEEL



10 YEARS WARRANTY

MATERIAL:

Vertical collectors in polished stainless steel with \varnothing of 38 mm.
Horizontal heating elements in polished stainless steel with \varnothing of 38 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990301076

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301075



Elegant square manual polished valve kit


Copper connection \varnothing 12/14/15
Art. Nr. 5991990301084

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990301083





Pipe covering kit for Pipe Centres 50 mm - valves polished

Art. Nr. 5103000000057



Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

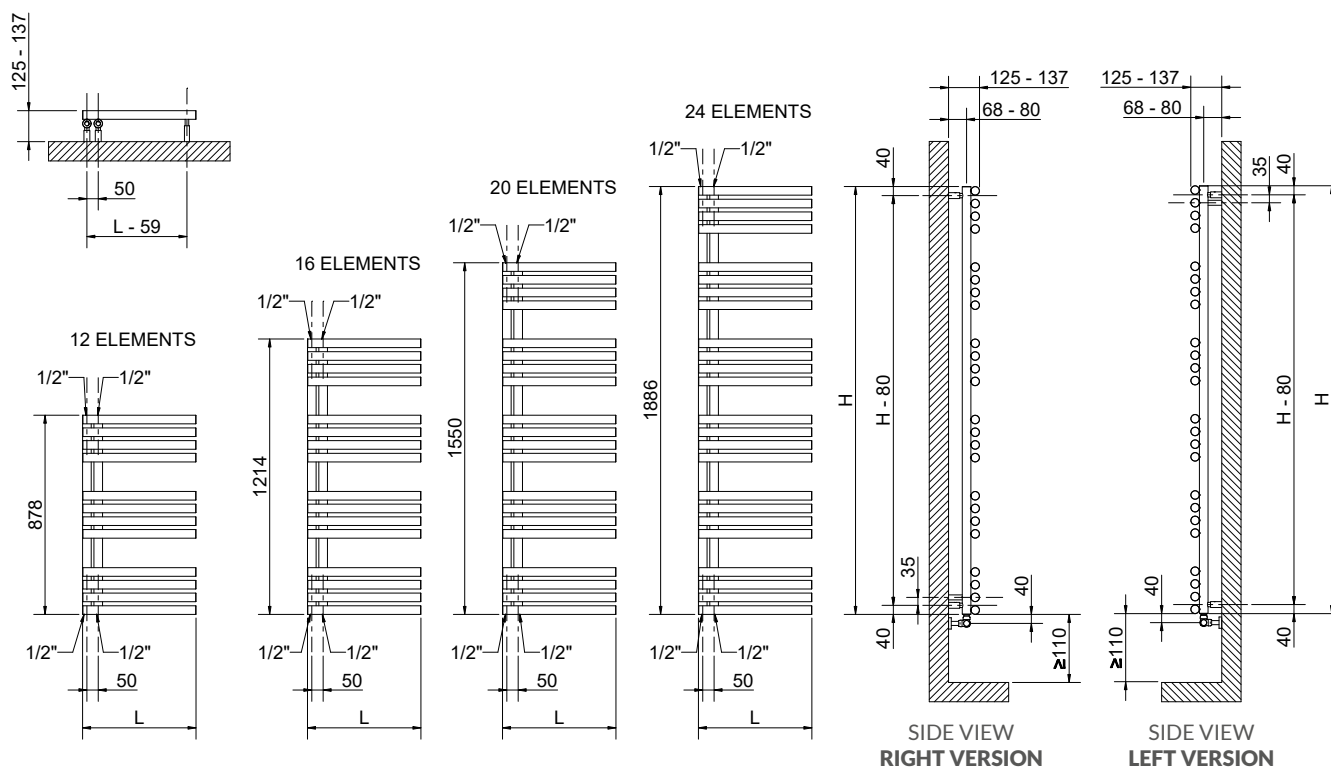

KELLY 38 POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	l [mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551780400120	878	500	50	9,9	0,926	7,3	277	139	1,3520
3551780400124		600	50	11,4	1,069	8,5	340	178	1,2640
3551780400121	1214	500	50	13,2	1,245	10,2	373	191	1,3130
3551780400125		600	50	15	1,436	11,4	418	219	1,2642
3551780400122	1550	500	50	16,4	1,564	12,6	515	271	1,2598
3551780400126		600	50	18,7	1,803	15	586	308	1,2563
3551780400123	1886	500	50	19,7	1,883	15,1	611	322	1,2550
3551780400127		600	50	22,2	2,169	17,5	704	368	1,2676

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^{\circ}\text{C}$ x (desired $\Delta t/50$)ⁿ



KELLY 38

SATIN STAINLESS STEEL



10 YEARS WARRANTY

MATERIAL:

Vertical collectors in satin stainless steel with \varnothing of 38 mm.
Horizontal heating elements in satin stainless steel \varnothing 38 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, installation notice.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box.
Use and maintenance notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES




P. max: 8 bar

T. max: 110° C

Available for central heating systems

Connections: n° 4 x G 1/2"

REVERSIBLE



ACCESSORIES



Elegant square satin valve kit pipe centres 50 mm with thermostatic head - right

Copper connection \varnothing 12/14/15
Art. Nr. 5991990320201

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990320200



Elegant manual square satin valve


Copper connection \varnothing 12/14/15
Art. Nr. 5991990320209

Multilayer connection \varnothing 16 x2
Art. Nr. 5991990320208





Pipe covering kit for Pipe Centres 50 mm - valves satin

Art. Nr. 5103000000058



Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm

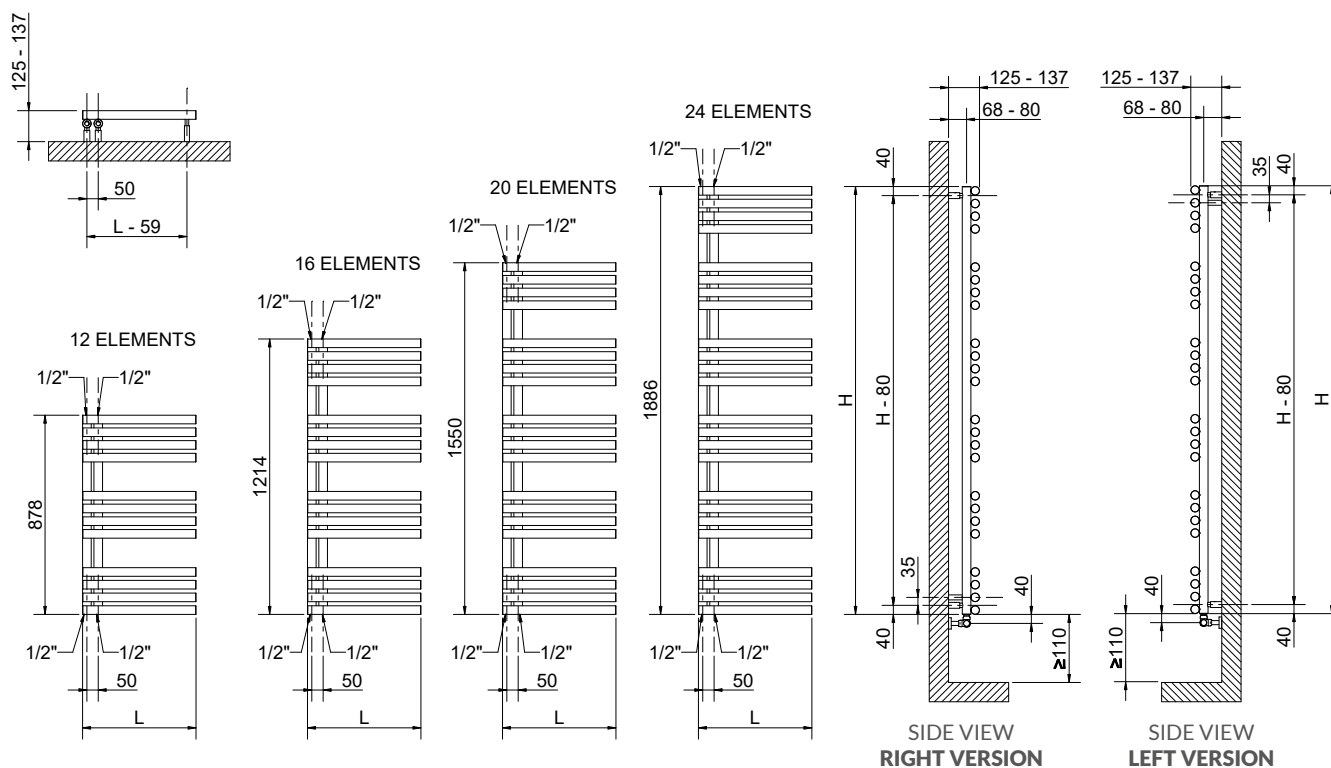

KELLY 38 SATIN STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	l [mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3551780500120	878	500	50	9,9	0,926	7,3	288	145	1,3616
3551780500124		600	50	11,4	1,069	8,5	354	185	1,2741
3551780500121	1214	500	50	13,2	1,245	10,2	388	199	1,3232
3551780500125		600	50	15	1,436	11,4	435	228	1,2744
3551780500122	1550	500	50	16,4	1,564	12,6	536	282	1,2699
3551780500126		600	50	18,7	1,803	15	609	320	1,2665
3551780500123	1886	500	50	19,7	1,883	15,1	635	335	1,2650
3551780500127		600	50	22,2	2,169	17,5	732	383	1,2776

For output at different Δt than 50°C , please refer to the following formula = desired output = output at $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t/50)^n$